



Southwire™

CONECTORES DÚPLEX

2 TORNILLO - TIPO PINZA - PARA CABLE BX, FLEX, NM Y MC - HIERRO MALEABLE

CARACTERÍSTICAS

- Tipo de abrazadera de tornillo dúplex
- Contratuerca listada UL
- Conexión macho NPT
- Cabeza de tornillo combinada triple

APLICACIÓN

- Uso únicamente en lugares secos interiores
- Conector tipo abrazadera utilizado para conectar conducto metálico flexible o cable armado a caja o gabinete

MATERIAL ESTÁNDAR


- Hierro maleable



360M

TIPO DE CABLE	TAMAÑO DE CABLE	DIÁMETRO DEL CABLE
CABLE ARMADO, ACERO	14/2 – 10/3	.48 – .58
CABLE ARMADO, ALUMINIO	14/2 – 10/3	.46 – .50
MCI-ALUMINIO	14/2 – 10/3	.488 – .810
MCI-ACERO	14/2 – 10/3	.47 – .60
MCI-A, ALUMINIO	14/2 – 10/3	.370 – .495
HCF, MCI A ALUMINIO	12/2 – 10/2	.418 – .495

NÚMERO DE PARTE	TAMAÑO	KO	INTERNO CANTIDAD	MAESTRO CANTIDAD	PESO/ CAJA (LBS.)	A	B	C
360M	3/8"	1/2"	10	100	16	.83"	2.17"	1.59"

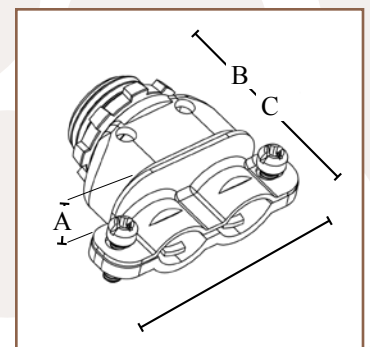

Rev. 0, 05/23

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

1-855-798-6657 | SOUTHWIRE.COM

©2023 Southwire Company, LLC. Todos los derechos reservados.
*Marca Registrada & ™ Marca de Southwire Company, LLC.